

# FENDT

## Fendt Rotana fixed chamber Round balers





Always in top form.  
Fendt Rotana.

When it comes to the harvesting of high-quality forage, you need machines that you can depend on. Fendt round balers give you everything that you need: Optimal and gentle handling of the crop and the uncompromising level of reliability result in perfect bales.



	130 F	130 F Xtra
Baler chamber diameter	1,25 m	1,25 m

Evident in each bale:  
Experience, innovation and reliability.

Each operation brings new challenges for man and machine. For this reason, the two fixed chamber balers, Fendt Rotana 130 F and 130 F Xtra offer you a whole range of equipment options and user-friendly operation. This ensures that you can give forage harvesting your full and undivided attention.



Baler chamber diameter	130 F Combi 1,25 m
------------------------	-----------------------

## Fendt Rotana 130 F Combi: Baling-wrapping combinations for quality forage.

High compression densities, precise cut and reliable wrapping, combining to produce perfect silage from high-quality forage to ensure healthy animals. The Fendt Rotana 130 F Combi includes the right features needed to do this, such as quick discharge and wrapping, and straightforward handling.

### Our product for your requirements

Every operation is different. For this reason, we offer the Fendt Rotana 130 F and 130 F Xtra fixed chamber balers. From the robust, simply-equipped and knife-free entry-level machine featuring low power requirements to the 130 V Xtra machine for professionals: The technical innovations make all the difference.

- 18 PowerGrip steel rollers
- HydroFlexControl cutting floor
- Knife group of up to 25 knives
- Cam-track-free pick-up
- Exceptional reliability
- Low power requirement
- Robust bale chamber
- Mechanical tailgate locking with bale density measurement
- Reinforced, steplessly adjustable drawbar
- Wrapping unit with adjustable plastic film stretching
- Shallow bale chamber tilt angle



### The perfect tool in any situation

With large tyres, a wide pick-up with optimal ground following and the lightweight, but robust design, the Fendt fixed chamber balers are at home in any terrain.

Forage harvesting translates to time pressure:  
But you can definitely rely on Fendt.

## PICK-UP

# A pick-up that misses nothing.



Thanks to the small gap between the pick-up and the rotor, the forage is transferred both gently and reliably. Thanks to the V-shape, the bale chamber is filled evenly, which in turn leads to top-notch bales.

### Pick-up for maximum output

The highest possible output can only be attained if you start with a perfect forage pick-up system. When it comes to Fendt round balers, this is guaranteed by a high-performance cam-track-free pick-up facility with a width of 2.25 m. The special geometry of the segment sheets and ideal angle of the extra-long tines have removed the difficulty from controlling cam tracks. Consequently, the pick-up contains fewer moving and wearing parts, runs smoother and is easier to maintain.

### Five tine bars

The absence of cam shafts and followers frees up additional space. This is why the pick-up now has five tine bars. In order to get the best possible forage pick-up, the extremely small tine gap has been set to just 64 mm. This ensures that no unused stalks are left behind in the field. Two lateral feed screws are also factory installed.

### The tines are decisive

The tines are the basic components of the pick-up. Its special work angle collects the forage in a manner that ensures that the sward remains protected. The diameter of 5.6 mm makes for an extremely long service life. Thanks to the large coils, the tines are very flexible. The robust manner in which the tines are fastened ensures that they do not break, as the voltage level is distributed evenly.

### Close to the rotor

Thanks to the very compact design, the pick-up is situated close to the rotor. This simplifies the process in which the forage is transferred from the pick-up to the rotor and aids crop flow. The benefits of this can be seen very clearly when working with short and brittle material, i.e. the material is conveyed to the bale chamber far more gently and efficiently. The optimal crop flow enables you to compress one perfect bale after another and achieve a high hourly output.

The series includes the double-sided feed screws. Thanks to their large shaft diameter, they never unravel the crop. Instead, they supply the crop directly to the rotor.



The steerable gauge wheels can be set to ten different positions, and therefore allow flexibility in the height adjustment.



Alongside the windguard, there is also a simpler variant with a deflector plate.



The uncontrolled pick-up is both maintenance-friendly and smooth-running.



## ROTOR

# Cut your forage as per your requirements.

### Perfect rotors for high output

Fendt's three round baler models feature four different rotors, which in turn ensure that the system is compatible with the area of application in question. The rotor speed is 134 rpm. The v-shaped arrangement of the conveying fingers ensures that the bale chamber is filled up evenly. Depending on the performance class, the compactors are equipped with either a rigidly fitted floor or a Hydroflex floor.

### Full flexibility: XtraCut 13 & XtraCut 17

The Fendt 130 F Xtra round baler uses either the XtraCut 13 or XtraCut 17 rotor. These two-finger rotors have been designed for the highest possible output and longest possible service life. In case of the XtraCut 13, you can decide whether or not you want to use a cutting table. The XtraCut 17 rotor attains a theoretical cutting length of 67.5 mm and offers a knife group engagement containing 0, 8, 9 or 17 knives. Dummy knives that make it possible to work without using knives are supplied with all round balers with cutting table, therefore preventing crumbling losses and protecting the cutting table from wear and tear.

### Quality of the cut for discerning producers: XtraCut 25

When it comes to output and the quality of cut, the Fendt XtraCut 25 rotor in the 130 F Xtra scores highest in Fendt's line-up of round balers: The v-shaped four-star rotor has been designed for very large harvests. In situations requiring very thin layers, it feeds the bale chamber with a cutting length of 45 mm, which in turn results in high-density bales. Hydroflex is always factory-installed here as well. There is a hydraulic knife group containing 0, 12, 13 or 25 knives.

### Cutting with the longest knife

Fendt's XtraCut models that are equipped with cutting tables feature the longest knife in the market, which in turn results in the best possible quality of cut. There is a hydropneumatic knife protection facility featuring two pressure accumulators, whose preload is 40 bar. This increases the service life of the round balers. If the knives can no longer move into the operating position, e.g. due to dirt, a pressure of 180 bar can be applied temporarily. The elaborate task of scraping the knife slits gives way to the simple touch of a button on the control unit.

With a theoretical cutting length of 45 or 90 mm, the XtraCut 25 rotor facilitates huge output and creates thin layers.



With a speed of 134 rpm, the XtraCut 17 rotor offers a theoretical cutting length of 67 or 135 mm.

The feed rotor is available with either a fixed cutting floor or the flexible hydroflex cutting floor.




The windguard can be adjusted easily using two chains on the side, which also optimises the crop flow to the rotor.



The top of the range 130 F Xtra model features hydraulic knife group engagement containing 0, 12, 13 and 25 knives.

## HYDROFLEXCONTROL

# Consistently smooth supply with HydroflexControl.



### Non-stop baling

Supply blockages are almost completely ruled out, even in difficult conditions. When the output keeps rising, the intelligent cutting floor found in Fendt round balers prevents blockages through its freedom of movement. This effective anti-blockage system allows stress-free compaction with high daily outputs.

### Two parts, singular comfort

In order to be able to make perfect use of the round baler throughout the day, blockages must be prevented before they occur. The HydroflexControl system in Fendt round balers ensures that this happens. 80% of blockages are reliably and effectively prevented through the interaction between two components, which in turn allows high daily output.

The Flexcontrol spring absorbs the load peaks from the front section of the cutting floor and therefore prevents blockages.

### Spring-mounted, lowerable

The first component is the permanent suspension of the cutting floor, which is known as 'Flex'. A spring can be used to gently swing the cutting floor upwards and downwards. This ensures that the cutting floor can respond to fluctuating forage quantities. 'Hydro' is the second component of the system. This component involves two hydraulic cylinders, which make it possible to hydraulically open the floor from the cab at the touch of a button, in order to either eliminate blockages or change knives. HydroflexControl enables you to move the machine over a long period of time hand in hand with high output.



The FlexControl load relief system reliably prevents blockages.



In the event of a blockage, the rear part of the cutting floor is lowered by 500 mm.



## POWERGRIP ROLLERS

# The right grip ensures proper rotation.



A pin on the tailgate ensures that it can be reliably closed even when used on slopes.

### Grip for reliable bale rotation

To achieve perfect bale quality, it is vital that the crop reliably rotates in the bale chamber, right at the start of each bale. The number of bale rotations and the pressure applied to the bales has a direct impact on the final bale density. A minimal gap between the rollers ensures maximum contact with the bales.

### Steel rollers, made for perfect bales

The eighteen PowerGrip steel rollers ensure maximum bale compression, outstanding baling efficiency, and rotation under all operating conditions. The ten longitudinal ribs are compressed into a 3.2 mm thick tube through a special manufacturing process. As each roller is seamless, the material structure gives the rollers an unbeatable service life and durability, which is unrivalled on the market today. This unique PowerGrip design is a patented feature of Fendt round balers and allows the balers to work in almost any conditions with any type of material.

### The bearings make all the difference

“Flexibility” is the watchword when it comes to absorbing massive force in different directions. As the bales expand in the bale chamber, this pressure is exerted onto the chamber’s side panels and moves them slightly. This is why all Fendt round balers have special bearing housings to counter this effect. Housings are attached to the drive side which allow the bearings to move slightly, but hold the baling rollers in place longitudinally so that the drive sprockets remain in line. On the non-drive side, the bearings can move longitudinally in order to counter the bale pressure on the side panels of the baling chamber and to absorb it. This massively improves the bearing’s durability.



Excessive axial loads are prevented by these flexible bearings, and extends the service life hugely.

The bale ramp – which can be adjusted without using any tools – gives the bale the desired momentum, and prevents a collision between the tail gate and the bale ramp.



The mechanical latch guarantees solid bales and ensures that the tailgate closes properly.




18 PowerGrip rollers always start the rotation reliably and ensure consistent compression.



## BALE CHAMBER

# Our bale chamber: The guarantor of perfect bales.



3 ribs of the PowerGrip steel rollers are constantly in contact with the bale and ensure reliable rotation.

### Firmly under control

The secret of the perfectly-compacted and even bales which are continuously produced using Fendt round balers lies in the tail gate. It has been designed to be particularly robust, because it has to be able to withstand exceptionally high loads. Special attention was paid to the mechanical locking latch.

### Practical details make all the difference

Fendt round balers provide genuine unique selling points which pay dividends in practical use. For example, the bale chambers have self-cleaning bearing housing for a longer bearing life. Moisture and any material which gets inside is removed by the wipers in the bearings. Therefore, it is not only bearings that are always clean, but also tracks, and the service life is not reduced.

### Best locking for the best bales

All Fendt round balers have a mechanically-locked bale chamber. The fact that the secure locking latch prevents the tail gate from swinging out ensures that firm and optimally-shaped bales are always created. The bale density is determined through precise measurement of the tailgate hook position. The sensors on both sides accurately measure the bale density provide the operator with indications of whether he must drive right or left to form a consistent bale.

### Stable guidance for short downtimes

Two stable cylinders are used to swing the bale chamber's tail gate open and shut. All you need is a single-acting control unit. All of this makes for short discharge times, and a Fendt Vario tractor will enable you to smoothly and steplessly raise the working speed within seconds. Fendt tractors and round balers thus make a perfect team.



Very solid, consistently formed bales: No problem thanks to Fendt round baler details.

## TYING

# Reliable tying: Part and parcel of Fendt round balers.

### Very easy set-up

In order to make things easier for you, we have focused sharply on user-friendliness. This can also be seen from the intuitive controls: Among other things, the terminal allows you to set the time for active net supply which is especially useful if the situation involves dry straw. The number of net turns and the net deceleration can also be quickly and easily adjusted using the terminal.


### VarioNet

Fendt round balers give you everything that you need when it comes to net ties. VarioNet is a net tie that is designed to suit all standard net widths. It features a net brake that can be adjusted using tension springs. Thanks to the intelligent design of the net guidance system, the net is automatically broadened. Consequently, the bales are also perfectly formed at the sides, and reliably protected. This also makes storage easier.

### Net changes made easy

Thanks to the EasyLoad system, the nets on all Fendt round balers can be changed very easily indeed. All you have to do is insert the net roller into the EasyLoadSystem and close it. A centring crank then automatically brings the net roller into the ideal position. Thanks to the cover between rotor and binding unit, no dirt or dust gets onto the net. That's how you always remain clean during a net change.

The EasyLoadSystem makes it possible to add net rollers in the shortest possible time.

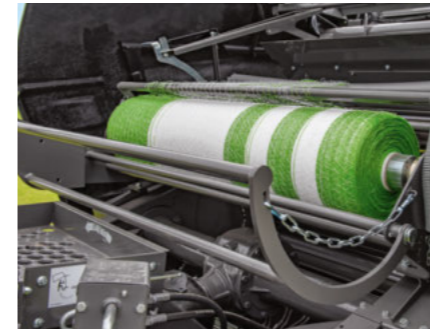

The VarioNet net tying system works with all standard net widths of 1.18 to 1.35 m.



The bales are also tied perfectly around the edges thanks to the net spreading device. This device minimises losses and facilitates storage.



Regardless of whether the situation involves a net tie or a twine tie: Fendt round balers always tie bales reliably.

## OPERATION

# Choose the best controls for your fixed chamber baler.

### Straightforward terminals

Straightforward operating terminals are available for Fendt fixed chamber balers, which make it easy to control and adjust balers. Manual terminals are easily and quickly installed in the tractor cab. The LCD displays are easy to read even in direct sunlight, and are user-friendly thanks to the clear button labelling.

### E-Link Control

The E-Link Control terminal makes balers even more efficient and user-friendly. The ergonomic design and colour display make handling easier. You can also choose between different material default settings for hay, straw or silage, and also set bales with a soft or hard core. The terminal offers you 10 different density settings and issues an acoustic warning when the maximum bale diameter has been reached. It also allows knife groups, bale size and net binding to be set. The field and total bale counter provides you with suitable reference values.

### E-Link Pro

The Fendt 130 F Xtra fixed chamber can also be fitted with the E-Link Pro terminal or ISOBUS terminal. The E-Link Pro control panel has been developed for professional baling. It has an ISOBUS control unit and a colour touch screen display for improved user friendliness. Using the E-Link Control terminal basic functions, net positions can be adjusted, and you can view information on the chamber fill level and the current status of the individual function units.



The E-Link Control terminal enables you to switch easily between the different material defaults and density levels.

The E-Link Pro terminal gives you more functions and has an ISOBUS control unit.



## GROUND DRIVE

# The power drive which gets everything started.

### Clear structure

The right side of the Fendt round balers houses the rotor drive, which is associated with a duplex chain. The 18 PowerGrip rollers are driven on the left-hand side. The chamber drive is divided into two tracks. Therefore, only every second roller is driven by a track, and less force is exerted onto the individual components, which leads to less wear and abrasion. The tracks are manufactured by Tsubaki; they are top-quality, durable items. The free wheel sprocket guarantees safety: If the transmission shaft is stopped or the rotor abruptly comes to a standstill because of a blockage, the free wheel facilitates a gradual deceleration of the bale rotation. This ensures that the main drive components are reliably protected against damage caused by abrupt stress.


### Very simple maintenance

Fendt round balers ensure that you won't have to spend a lot of time on maintenance. The light swing-up side flaps make it very easy to reach the maintenance points. The automatic track lubrication system – which is driven via the baling rollers – always reliably applies the desired quantity of oil to the tracks. This extends the lifetime and guarantees smooth motion. The bearings of the PowerGrip rollers are quickly and easily lubricated with the help of a central lubricating bar. There is no need to spend too much time searching for the lubrication points.

### More power with Power Split

All models are fitted with a Power Split gearbox. The power split transmission gearbox is a divided drive concept that distributes the required power to the rotor and chamber drive perfectly evenly. The input speed here is once again 540 rpm. In models without cutting floor, a 1650 Nm shear pin clutch guarantees safety. In the models with cutting floor, a cam and free wheel clutch also protects the drive train with 1950 Nm.


The Power Split gearbox runs at a PTO speed of 540 rpm.

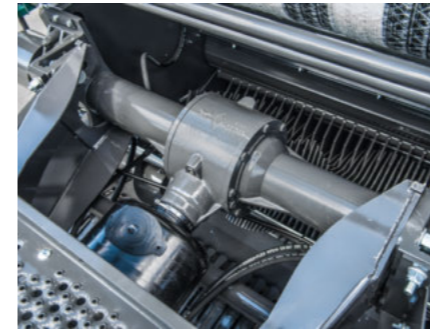

The chamber drive is divided into and powered by two tracks.



The free wheel sprocket ensures that the drive train is protected against damage in the event of a rotor blockage.

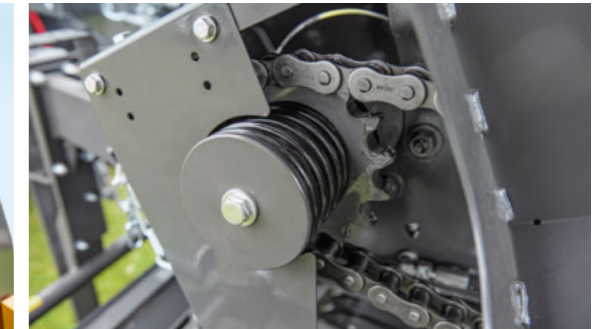

Fendt round balers only use Tsubaki chains.



The 50 mm bearings on the rollers are designed for extremely high loads.



The 18 PowerGrip rollers can be fitted with lubricated 50 mm rollers.



## Modular design: Fendt baling-wrapping combinations.

Owners of the Fendt Rotana baler-wrapper combination also enjoy the benefits of the Fendt Rotana round balers. Thanks to the modular system, the wrapping unit can be easily attached to the baler. Transfer is always reliable thanks to the shallow bale chamber angle.

FENDT ROTANA 130 F COMBI

# Because some things in life are simply the best.

### Quality that inspires

The Fendt Rotana 130 F Combi combines balers and wrapping with maximum quality, precision and efficiency. The tried and trusted baling technology of the fixed chamber round baler forms the heart of this machine. The machine impresses with all the key features of the proven round baler, such as the robust power split gearbox in an oil bath, and the cam track-free pickup, which ensures perfect forage pickup and optimal crop flow. The 18 PowerGrip steel rollers and mechanical tailgate lock guarantees perfectly formed bales and bale densities. Blockages are also a thing of the past on this machine thanks to HydroflexControl. The feed channel floor can move down slightly to allow stones or forage to pass through.

### Irresistible arguments

The Fendt Rotana 130 F Combi stands out in every aspect. The bale chamber has a shallow tilt angle, which provides excellent stability, especially on slopes. The shallow tilt angle also means optimal crop flow and output. High operating speed is the second ace in the pack. Using the fully-automatically adjustable wrapping system, the machine measures the bale diameter during net tying, and the optimal number of plastic film layers is calculated in the same step.

### Bale transfer made easy

Tailgate up and out. Bales are carefully transferred to the wrapping table by the actively movable panels and a transfer arm. This design is suited in particular to slopes. The machine adjusts to the speed of the transfer arm, and places the side plates at a steeper angle so that the bales can be guided to best effect. The wrapping ring also acts as a guard so that bales do not fall from the wrapping table. This is what ensures an optimal wrapping process in any conditions.


### Pure flexibility

A smooth-running drive means little maintenance. The wrapping ring is therefore guided and driven by rubber rollers. Two other hydraulically-driven rollers ensure that the guiding and tension of the ring remains constant. The entire wrapping ring is also mounted on rubber rollers. The smooth and even running which results, gives the drive additional reliability with very low drag and secure bales, optimal requirements therefore for precise and quick wrapping.

The professional cutting rotor with six tines on each ring and the Xtracut 25 table makes short work of your grass.

Blockages are reliably prevented by HydroflexControl. In the event of blockages, the rear section of the cutting floor can be lowered by 500 mm.

The bale is guided by the bale fork and transferred to the wrapping table. The tailgate can then be closed again immediately.

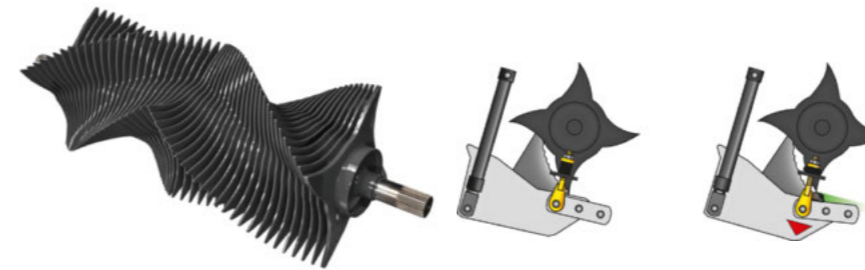

Choose between the E-Link Pro terminal with colour camera or the Varioterminal on ISOBUS-enabled tractors.

Operating the baler-wrapper combination is really easy via the rear control panel on the machine for manual operation.

## WRAPPING TABLE AND DELIVERY

# The solution for fast packing.

### Wrapped in seconds

The Fendt Rotana 130 F Combi only starts the wrapping process when the bales are secure on the wrapping table. Two rollers and three infinite belts allow the bales to rotate securely on the wrapping table. Four plastic rollers on the sides also keep the bales in position. To get the right wrapping for any forage, you can change the pre-tension of the plastic film quite easily by shifting gear. Choose between three plastic film tensions: 55%, 70% or 90%. Thanks to the intelligent wrapping system and a sensor roller, the optimal number of plastic layers are wrapped around the bales, with an even overlap of each layer.

### Careful delivery

In order to guarantee maximum bale quality, the wrapping table moves down as far as possible and bales delivered close to the ground. The bale mat delivers the bales slowly and carefully behind the machine without risking damage to the plastic from the stubble. The bales lie securely on the ground and do not roll away on steep terrain. Front delivery can also be used as an option. You can also compress bales quite normally if the wrapping ring is raised.

### Small details make all the difference

In order to offer the right cutting/clamping device range for any plastic film height, the Fendt Rotana has a two-stage device with an extremely wide opening. The special locking mechanism ensures that the film is held very securely, to allow a perfect cut and to hold it in the right position. If the film tears, the bales can be wrapped using the remaining plastic or the ring pauses to allow the film to be repaired. The process works with the aid of a film sensor programmed from the hand set.

### Simple and compact

Narrow roads and bridges are no problem for the Fendt Rotana. Despite the large tyres, the 2.80 transport width still gives you flexibility. The large tyres also provide optimal soil protection, and protects the sensitive sward and soil, especially when turning.

By delivering bales on their front face, they are perfectly positioned for quick pick-up with a bale clamp.



Careful driving of the wrapping ring via hydraulically driven rubber rollers quickly reaches the right speed for a consistent wrapping process.



The Fendt Rotana FC has 620/55 R 22.5 tyres for optimal ground following and safe road driving.




You no longer have to take the plastic film with you on the 12 film holders. Simply place the rollers with packaging into the individual foldable tines.



FENDT ROUND BALERS – EQUIPMENT DETAILS

Well-thought-out up to the very last detail, so that everything runs like clockwork at your end.

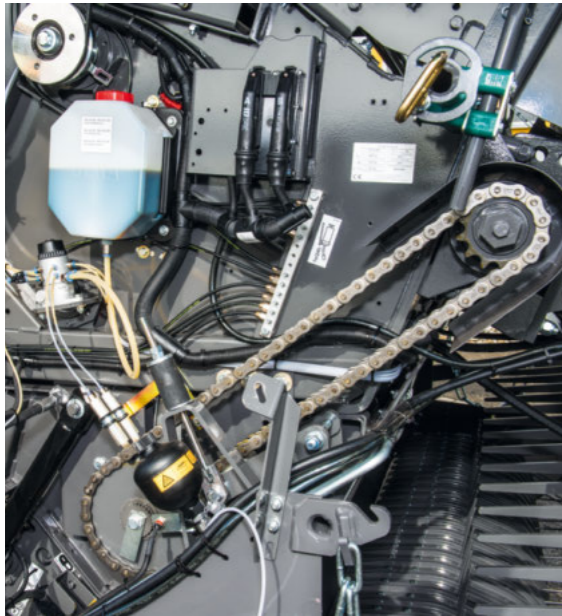

■ The quantity of oil to be used to lubricate the tracks is individually adjustable.

■ The large tank feeds brushes or sponges which distribute the oil evenly on the track.



FENDT FIXED CHAMBER ROUND BALERS.

Configuration variants and technical details.

		130 F	130 F Xtra	130 F Combi
<b>General data</b>				
Baler chamber diameter	m	1,25	1,25	1,25
Baler chamber width	m	1,23	1,23	1,23
Baler chamber volume	m <sup>3</sup>	1,50	1,50	1,50
PowerGrip rollers	Number	18	18	18
Overall height	m	2,6	2,60	3,00
Overall length	m	4,5	4,50	6,30
Overall width	m	2,7	2,70	2,90
Approx. weight	kg	3.000	3.400	6.450
Power requirement	kW/hp	45 / 60	60 / 80	100/140
<b>Drive/gearbox</b>				
Power Split gearbox		■	■	■
PTO drive	rpm	540	540	540
Implement driveline with free wheel and cam clutch		□	■	■
WW implement driveline		■		
Implement driveline with free wheel and WW joint		□	□	□
Automatic chain lubrication		■	■	■
Lifetime lubricated roller bearings		■		
Bearing lubricated by lubricating points on both sides		□	■	
Automatic roller lubrication			□	■
<b>Drawbar</b>				
Height-adjustable traction drawbar		■	■	■
Rigid drawbar eye hitch		■	■	■
Turnable drawbar eye hitch				
K80 hitch		□	□	□
<b>Pick-Up</b>				
Uncontrolled pick-up		■	■	■
Pick-up 2.00 m		□	□	
Pick-up 2.25 m		■	■	■
Pick-up 2.40 m		□	□	□
Pick-Up Alpin Kit		□	□	□
Tine rows	Number	5	5	5
Tine spacing	mm	64	64	64
Baffle plate		□		
Fixed roller windguard		■	■	
Variable roller windguard		□	□	■
Rigid pick-up wheels		■	■	
Swinging pick-up wheels		□	□	■
Alpine kit				
<b>Table/rotor</b>				
Without table with conveyor rotor		■		
Without table – 2-star conveyor rotor			□	
XtraCut – 13 knives with 2-star conveyor rotor			□	□
XtraCut – 17 knives with 2-star conveyor rotor with group shift (8-9-17)			□	□
XtraCut – 25 knives with Profi rotor with group shift (12-13-25)			□	□
Potential cutting length	mm		90 / 70 / 45	90 / 70 / 45
Fixed conveyer floor		■		
HydroflexControl cutting floor			■	■

Standard and optional equipment  
 Standard: ■  
 Optional: □

FENDT FIXED CHAMBER ROUND BALERS

# Configuration variants and technical details.



		130 F	130 F Xtra	130 F Combi
<b>Tying</b>				
Varionet net tie		■	■	■
Easy Load System ELS		■	■	■
Additional net roll holder		□	■	
Bale ejector		□	□	
<b>Controls</b>				
E-Link Control		■	■	
E-Link Pro			□	□
ISOBUS			□	■
<b>Chassis</b>				
Trailer axle		■	■	■
Hydraulic brake assembly		□	□	□
Compressed air brake assembly		□	□	□
Permitted top speed undamped	km/h	25	25	25
Permitted top speed damped	km/h	40	40	40
<b>Wrapping unit</b>				
Foil width 500 mm				□
Foil width 750 mm				□
Foil capacity	Number			12+2
Pre-stretch 33%/55%/70%				■
Foil tear monitoring				■
2 colour cameras				□
Front bale chute				□
<b>Tyres</b>				
15/55-17		■	■	
19/45-17		□	□	
480/45-17		□	□	
500/45-22,5			□	
500/50-22,5			□	
500/60-22,5			□	
500/55-20			□	
620/55 R26,5				■

# Safety and service non-stop.

**What is special about Fendt Service?**  
 For us, service means knowing and understanding your work in order to meet your demands for reliability and safety, and to act in your economic interest. We stand behind our products and have developed them for the highest demands and long-term operation. Our service is the partnership aspect for your work.

**Where are the Fendt round balers developed and manufactured?**  
 The Fendt round balers are manufactured in Wolfenbüttel, Germany, our European centre of expertise for round balers. This site can draw on plenty of experience. Its patents have shaped compacting technology on a global scale, and they enable the company to continue influencing this field both now and in the future. The test department always considers the requirements that emerge in practice to be the catalyst for new developments that keep improving round balers and make your work easier.

# Contact Fendt.

**fendt.com**  
 Find everything on line – from brochures to technical specifications, from reports about customers or our company to our Fendt event calendar.

**Fendt Configurator**  
 With the Fendt Vehicle Configurator, you can choose from all the available equipment variations and put together the optimally equipped machine for your farm. The Fendt Configurator is available online at [www.fendt.com](http://www.fendt.com), where you will find a quick link to it directly on the start page.

**fendt.tv**  
 Fendt around the clock – our Fendt Media Library makes it possible. Our internet TV provides you with news and information about Fendt 24/7.

**facebook.com/FendtGlobal**  
 Follow us on Facebook and find out what's new in the Fendt world. Come have a look.

**instagram.com/fendt.global**  
 Follow us on Instagram and become a Fendt fan. Fascinating articles on Fendt are waiting for you here.



# FENDT

## Leaders drive Fendt!



[www.fendt.com](http://www.fendt.com)

AGCO GmbH – Fendt-Marketing  
87616 Marktobendorf, Germany

 **AGCO**  
Your Agriculture Company

Fendt is a worldwide brand of AGCO.  
All data regarding scope of delivery, appearance, performance, dimensions and weights, fuel consumption and running costs of vehicles reflect the latest information available at the time of print. These may change by the time of purchase. Your Fendt dealer will be happy to inform you about any changes. The vehicles shown do not feature country-specific equipment.